


JP 30

Wall mounted rain shower head
Designer: John Pawson



1/2" connection to copper, steel, iron or pex pipe work


Dimensioned drawing

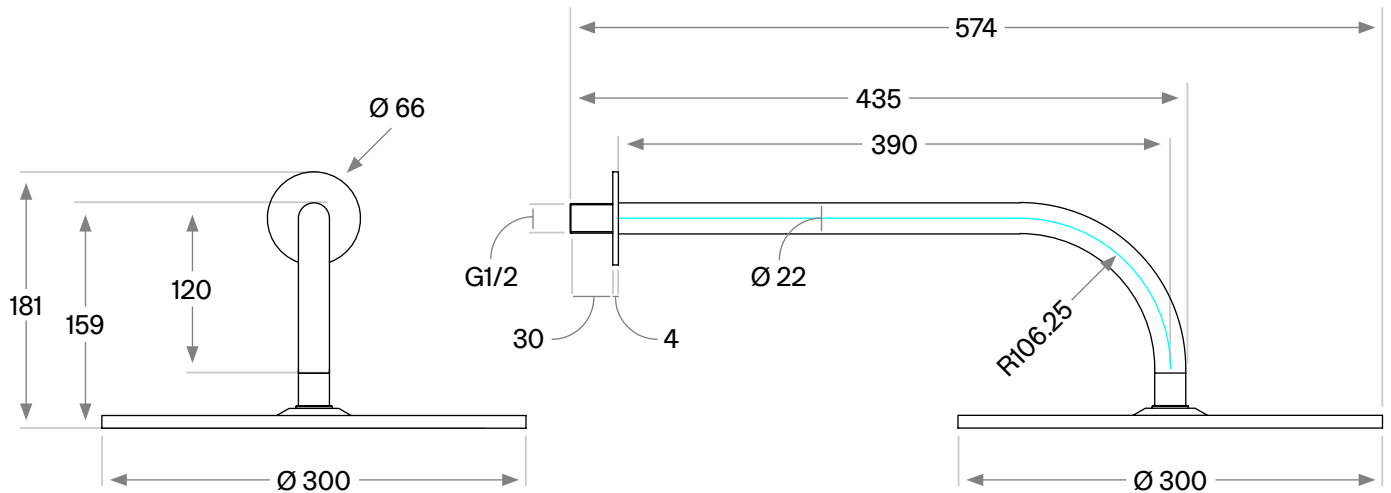




1/2" connection to copper, steel, iron or pex pipe work

Spare Parts List

Part no	Spare part code	Article No	Description	QTY
1.	JP30-001	70NBR103F	O ring Ø58 X 2	1
2.	JP30-002	70NBR103F	O ring Ø21.5 X 2	1
3.	JP30-003	JP30-003.000	Rosette	1
4.	JP30-004	JP30-004.000	Shower arm	1
5.	JP30-005	JP30-005.000	Round shower head	1

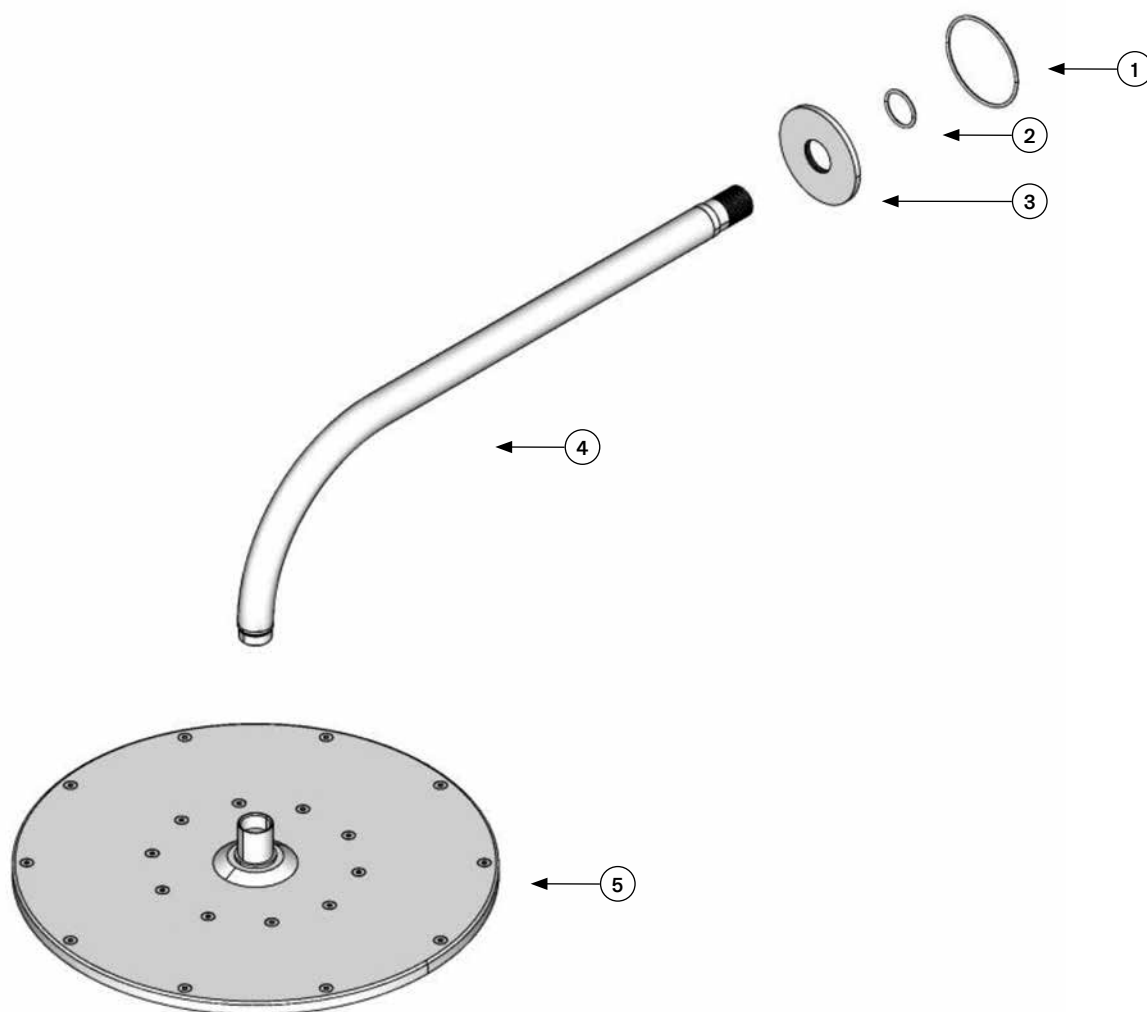

Installation Manual

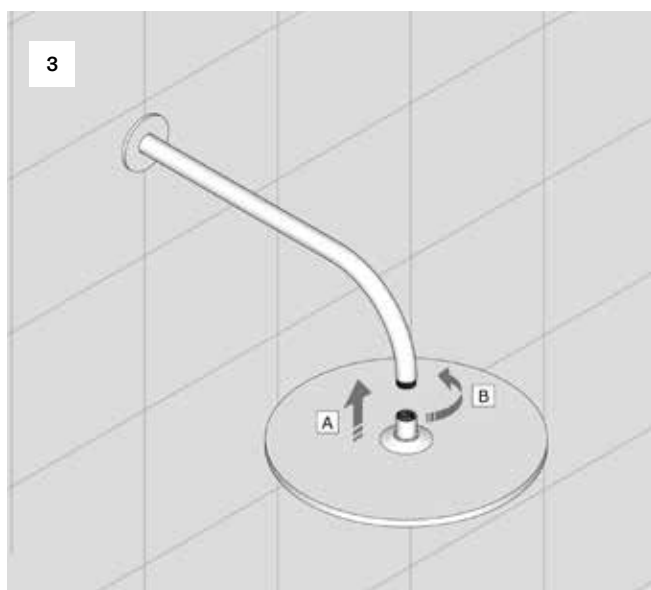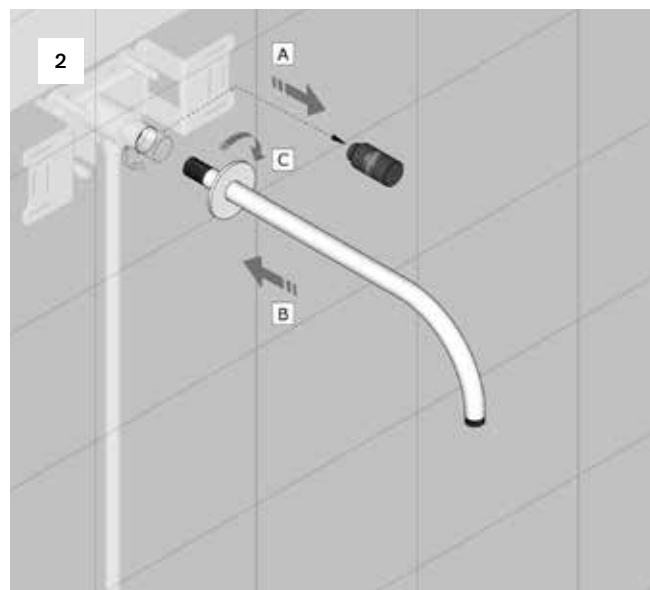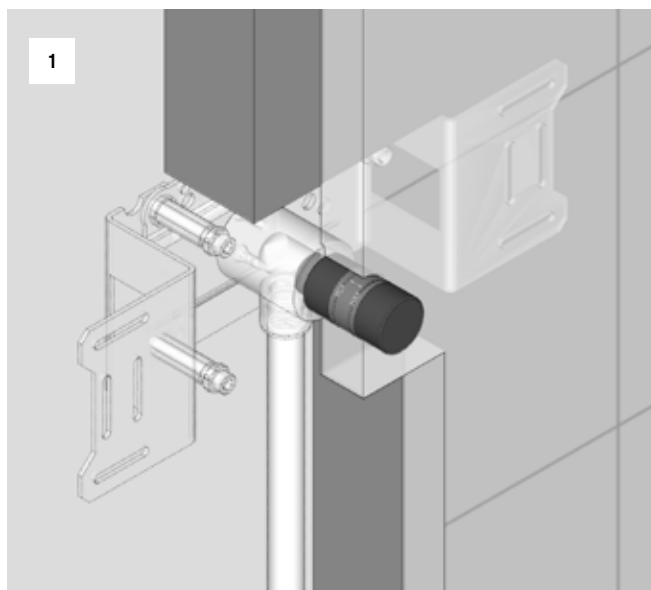

Settimanalmente pulire
gli ugelli anticalcare


Weekly clean the nozzles
to remove any lime scale

Technical warning

The pipes have to be rinsed
thoroughly before installation
to avoid pressure differences.

Use of a pressure reducer
when static pressure is higher
than 5 bars to avoid damage
to the cartridge.

AERATORE IN DOTAZIONE / AERATOR INCLUDED
Aeratore montato / Mounted aerator
5.5 l/min / 1.2 gpm

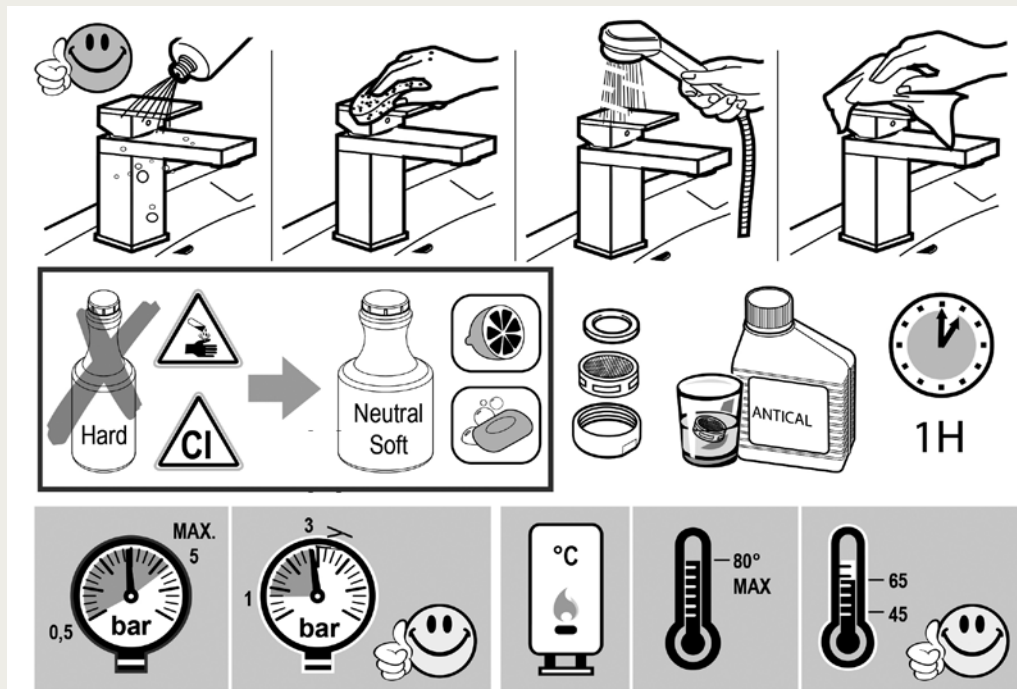

Please ensure you comply with the following instructions to optimise performance of the mixer:

- All pipework must be thoroughly flushed prior to installation
- For USA installation, please fix the USA NPT adapters on top of the pre-installed water connections
- Always first test the system with water pressure before closing the walls
- Optimal water pressure 3 BAR / temperature should not exceed 65°C/149°F
- Please read all installation instructions carefully

Failure to comply with manufacturers recommendations will void warranty